

(EN) Installation instructions for plaster decorative tiles*


Preparation of the substrate:

The substrate for decorative tiles should be dry, even and stable (free from dust, dirt, lime, oil and grease). Any dirt on low-strength paint coating should be removed. The wall should be primed with MAXGRUNT primer.




Installation:

Before fixing the tiles plan a layout, prepare the tiles and check if they have any visible defects or discoloration. Use a wire brush or polystyrene grater to remove gypsum bloom formed during the production process from the back surface of the tile.

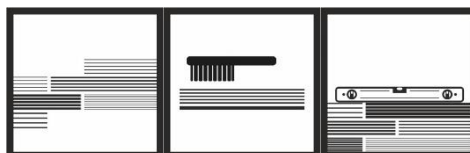

When installing tiles with a ready joint, lay them with the joint facing up. The tiles should be taken from several packages at the same time to eliminate any colour differences. If there is no even, horizontal support for the tiles, use a horizontal starting strip. It is recommended to use MAXGLUE universal adhesive for fixing the tiles, and apply it according to the instructions on the package. Do not fix the tiles one under the other in a vertical row. It is best to fix the tiles in the successive rows with the tiles shifted by a half of their length in relation to the previous row.

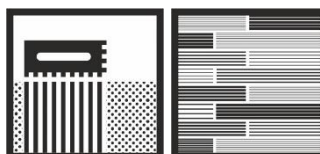

For cutting you can use a hand saw for wood or metal. Installation should be carried out at a temperature between 5°C and 25°C. In order to avoid differences in the tile colour tones, it is recommended to buy products from one production batch. The manufacturer does not accept complaints concerning tiles purchased at long intervals.

Maintenance:

After fixing the tiles, after at least 48 h (or after the adhesive and the tiles are completely dry), the stone should be impregnated with MAX-ME IMPREGNATE (2L or 5L). Impregnating agent can change the colour tone of the tile, so before impregnating them, it is recommended to carry out a test on a loose tile to check if the end result is acceptable.

Note!

Any installation activities should be performed in accordance with good building practice and OHS rules based on the above instructions. Tiles should not be installed in places where the temperature exceeds 50°C and in places with high humidity. Slight differences in the colour tones of tiles are normal due to the manual nature of the production process. The manufacturer does not bear liability for improper installation, and complaints regarding sizes and colours after installation will not be granted.

* This instruction applies to the tiles: CAMPANIA, HARVARD, TURMALIN, HAVANA, TAURUS, SILO, MONT BLANC, LUGANO, WHITE BRICK, STANFORD..